

WALL OR WINDOW EXTRACT FANS HCM-N Series



Range of axial flow fans designed to exhaust air directly to the outside.

All the fans are manufactured from injection moulded plastic and fitted with automatic shutter and single phase 230V-50Hz, class B motor, thermal protection, "fuse". All the fans are class II insulation and IPX4 rated.



External shutter

Overpressure shutter.




Safety guards

Guards fitted at the inlet and outlet of the fan to prevent the entry of any foreign objects.



EASY INSTALLATION IN GLASS OR WALL



Mounting in glass:


Maximum diameter (3 to 6 mm).

Cut hole diameter (mm).

HCM-150 N: 183 to 188

HCM-180 N: 220 to 225

HCM-225 N: 262 to 267



Mounting in wall:


Cut hole diameter (mm).

HCM-150 N: 183 to 188

HCM-180 N: 220 to 225

HCM-225 N: 262 to 267

DIMENSIONS (mm)

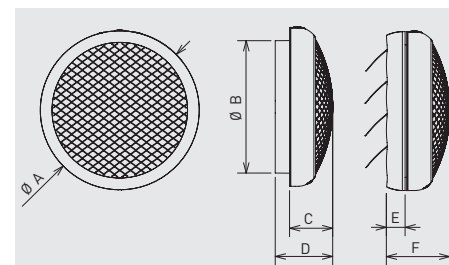

Model	ØA	ØB	C	D	E	F
HCM-150 N	214	174	60	88	35	98
HCM-180 N	255	205	86	120	35	135
HCM-225 N	298	248	89	119	35	125

ACCESSORIES



REB

Electronic single phase speed controller.

TECHNICAL CHARACTERISTICS

Model	Speed (rpm)	Maximum absorbed power (W)	Voltage	Maximum airflow (m³/h)	Sound pressure level* (dB(A))	Weight (kg)
HCM-150 N	1900	25	230V-50Hz	220	42	0,9
HCM-180 N	1950	28	230V-50Hz	450	43	1,7
HCM-225 N	1350	28	230V-50Hz	600	45	1,8

* Sound pressure level measured at 1,5 m, at the inlet side, in free field.