

CEILING FANS

HTB-150N IP55 / HTB-150 RC IP 55 Series



Ceiling fan of 150 cm diameter, designed to work in difficult conditions, silent and easy to install.

Three-speed operation, with control included.

Anticorrosion treatment.

Rust proof, protected against dust particles and jets of water in all directions.

Reversible direction of rotation, via connexion.

Motor with thermal protection.


Possibility of reversible rotation

The reversible rotation of the fan allows sending the air to the ceiling.

IP55

PROTECTION

DIMENSIONS (mm)

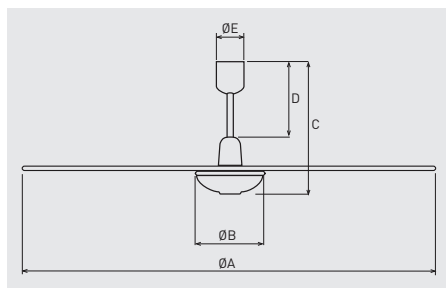

Model	ØA	ØB	C	D	E
HTB-150 N	1420	250	460	255	98
HTB-150 RC					




Three-speed control included.
Can be installed on a surface or wall-mounted.
IP55 (when not wall-mounted).
Dimensions LxWxH (mm): 80x80x70



Switch with reversible rotation.



Accessory: Remote control with 1h / 3h / 6h timer for HTB-RC fans (not included)



Protected against jets of water in all directions.

TECHNICAL CHARACTERISTICS

Model	Voltage 50-60 Hz (V)	Nominal power (W)	Intensity (A)	Airflow* (m³/h)	Maximum air output speed (m/s)	Maximum sound power level (dB(A))	Nº Speeds	Speeds (rpm)	Colour	Weight (kg)
HTB-150 N IP55 HTB-150 RC IP55	230	65	0,30	11.000/8.700/6.250	2,4	52	3	265/190/150	Grey RAL 9002	9,2

* The indicated airflow include induced airflow. According to IEC 60879 regulation.
Technical data are calculated at 50Hz.