



Ceiling fan of 150 cm diameter, designed to work in difficult conditions, silent and easy to install.


- Three-speed operation, with control included.
- Anticorrosion treatment c3 medium grade and stainless steel screw.
- Rust proof, protected against dust particles and jets of water in all directions.
- Reversible direction of rotation, via connexion.
- Motor with thermal protection.

Possibility of reversible rotation

The reversible rotation of the fan allows sending the air to the ceiling.




DIMENSIONS (mm)

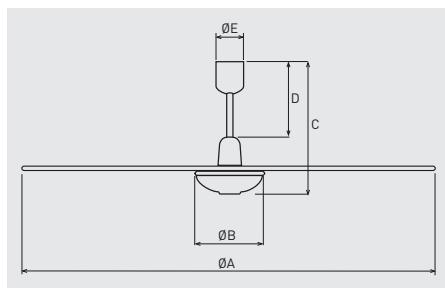

Model	ØA	ØB	C	D	E
HTB-150 RC IP55	1420	250	460	255	98



Three-speed control included. Can be installed on a surface or wall-mounted. IP55 (when not wall-mounted). Dimensions LxWxH (mm): 80x80x70



Protected against jets of water in all directions.



Switch with reversible rotation.



KIT RC HTB
Remote control with 1h / 3h / 6h timer for HTB-150 RC IP55 fan (not included)

TECHNICAL CHARACTERISTICS

Model	Voltage 50-60 Hz (V)	Nominal power (W)	Intensity (A)	Airflow* (m³/h)	Maximum air output speed (m/s)	Maximum sound power level [dB(A)]	N° Speeds	Speeds (rpm)	Colour	Weight (kg)
HTB-150 RC IP55	230	65	0,30	11.000/8.700/6.250	2,4	52	3	265/190/150	Grey RAL 9002	9,2

* The indicated airflow include induced airflow. According to IEC 60879 regulation. Technical data are calculated at 50Hz.