



Range of rectangular duct fans suitable for many general ventilation applications where the fan is required to be installed within a rectangular ducted ventilation system or where the space for installation is limited.

High performance centrifugal fans.

All models suitable for mounting in any orientation.

Casing manufactured from heavy gauge galvanised sheet steel.

Direct drive backward curved impellers manufactured from aluminium sheet.

External rotor motor, Class F insulation with thermal protection.

Remote terminal box.

Motors

Motor and impeller fitted on the inspection cover enabling easy cleaning and maintenance.


- IRB models: Single-phase 230V-50Hz.

IP44* or IP54, class F. Speed controllable by transformer.

- IRT models: Three-phase 230/400V-50Hz.

IP54, class F. Speed controllable by transformer or frequency drive.

* IP44: 2-180, 2-200, 4-225 and 4-315 A




Inspection door
Inspection door that facilitates maintenance.



Versatile design
Can be installed in any position.



Centrifugal backward curved impeller
To prevent accumulation of dirtiness. Dynamically balanced.



IP55 remote terminal box
To ease installation and maintenance and connection to external controls.

TECHNICAL CHARACTERISTICS

Before making any electrical connection ensure that the voltage and frequency of the mains electrical supply matches that of the fan data plate label.

Model	Nominal ducting diameter (mm)	Speed (rpm)	Maximum absorbed power (W)	Maximum absorbed current to 230V (A)	Maximum airflow (m³/h)	Maximum ambient temperature (°C)	Sound pressure level* (dB(A))			Weight (kg)	Speed controller**
							Inlet	Radiated	Outlet		
SINGLE PHASE											
IRB/2-180	300x150	2690	63	0,3	510	-30/70	56	42	59	10	RMB-1,5
IRB/2-200 A	400x200	2635	136	0,6	1.010	-30/70	59	46	62	16	RMB-1,5
IRB/2-200 B	400x200	2610	204	0,9	1.350	-30/70	61	48	65	16	RMB-1,5
IRB/4-225	500x250	1388	152	0,6	1.600	-40/70	59	51	63	30	RMB-1,5
IRB/4-315 A	600x350	1397	278	1,2	2.620	-40/70	59	51	63	37	RMB-1,5
IRB/4-315 B	600x350	1388	569	2,4	3.710	-40/70	66	58	71	43	RMB-3,5
IRB/6-315	600x350	924	465	2,3	2.900	-40/60	59	53	66	37	RMB-3,5
IRB/4-355	700x400	1402	845	3,6	5.600	-40/50	66	55	72	56	RMB-8
IRB/6-355	700x400	909	572	2,4	4.730	-40/70	61	53	66	56	RMB-3,5
IRB/6-400	800x500	935	840	3,7	7.230	-40/70	64	55	70	66	RMB-8
IRB/6-450	1000x500	924	1416	6,1	8.930	-40/70	67	61	74	97	RMB-8

* Sound pressure level measured in free field condition at 1.5m, at the medium working point on the performance curve shown 2.

** Frequency inverter selection: see electrical accessories section.

Model	Nominal ducting diameter (mm)	Speed (rpm)	Maximum absorbed power (W)	Maximum absorbed current (A)		Maximum airflow (m³/h)	Maximum ambient temperature (°C)	Sound pressure level* (dB(A))			Weight (kg)	Speed controller**
				230V	400V			Inlet	Radiated	Outlet		


THREE PHASE

IRT/4-315 A	600x350	1398	244	0,9	0,5	2.550	-40/50	59	53	65	37	RMT-1,5
IRT/4-315 B	600x350	1415	568	2,1	1,2	3.850	-40/70	68	59	72	43	RMT-1,5
IRT/4-355	700x400	1396	813	2,9	1,7	5.560	-40/60	67	55	73	52	RMT-2,5
IRT/6-355	700x400	896	587	2,1	1,2	4.750	-40/50	64	51	68	52	RMT-1,5
IRT/4-400 A	800x500	1431	1501	5,5	3,2	7.940	-40/70	70	61	76	80	RMT-5
IRT/4-400 B	800x500	1393	2142	6,9	4,0	9.580	-40/40	72	62	78	80	RMT-5
IRT/6-400	800x500	938	823	3,3	1,9	7.280	-40/40	64	54	70	77	RMT-2,5
IRT/4-450	1000x500	1381	2379	7,4	4,3	10.720	-40/40	74	67	80	96	RMT-5
IRT/6-450	1000x500	927	1418	5,9	3,4	9.090	-40/60	68	60	75	97	RMT-5

* Sound pressure level measured in free field condition at 1.5m, at the medium working point on the performance curve shown 2.

** Frequency inverter selection: see electrical accessories section.

DIMENSIONS (mm)

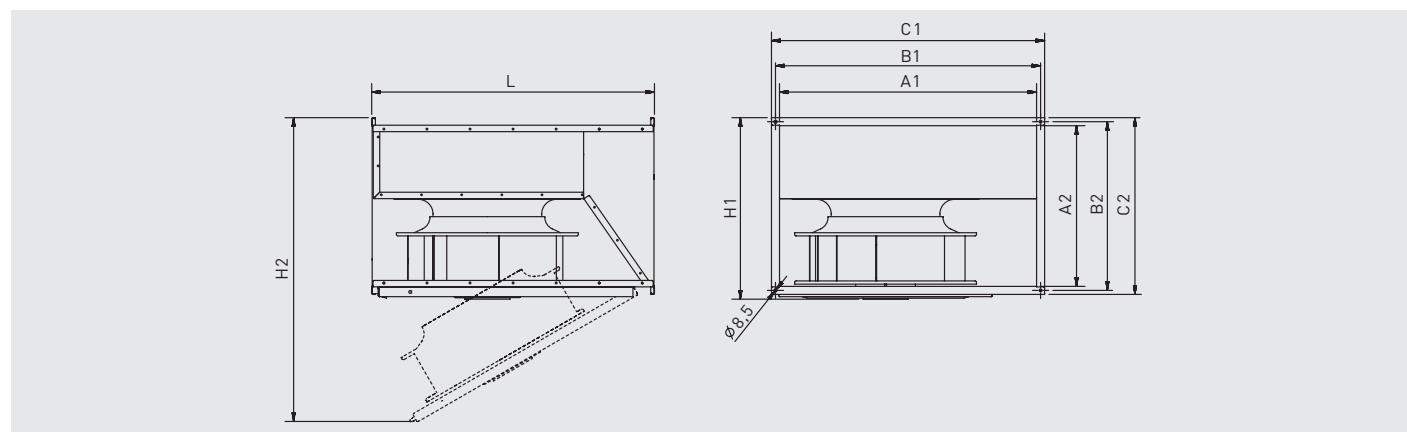


Model	A1	A2	B1	B2	C1	C2	H1	H2	L
180	300	150	320	170	340	190	200	480	375
200	400	200	420	220	440	240	250	650	500
225	500	250	520	270	540	290	300	730	530
315	600	350	620	370	640	390	405	1020	720
355	700	400	720	420	740	440	460	1135	790
400	800	500	820	520	845	545	565	1330	880
450	1000	500	1020	520	1045	545	565	1430	980


PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{sf} : Static pressure in Pa.
- SFP: specific fan power in $W/m^3/h$ (blue curves).
- P: Input power in W.
- Performance data in accordance with ISO 5801.

IRB/2-180

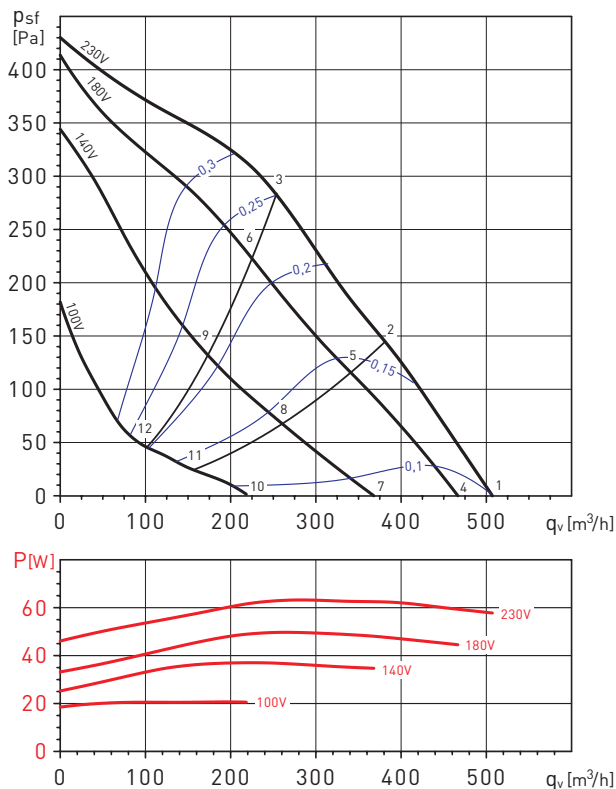

IRB/2-200A

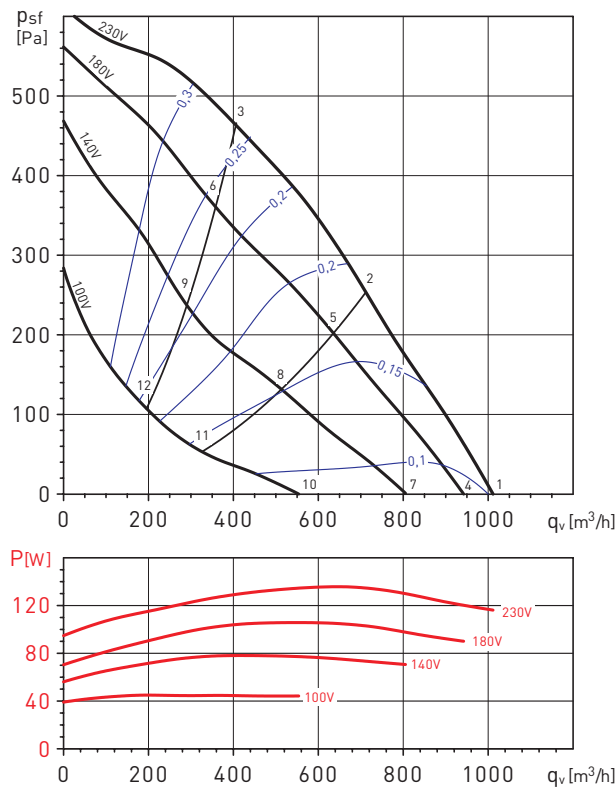

Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	36	42	69	62	67	68	63	74
	Outlet	37	40	64	66	72	73	67	77
	Radiated	31	33	55	49	53	53	49	61
2	Inlet	31	39	63	57	64	65	60	70
	Outlet	33	37	62	63	68	69	63	73
	Radiated	26	30	50	45	49	50	43	56
3	Inlet	31	41	62	57	63	62	55	68
	Outlet	32	39	60	61	66	66	58	70
	Radiated	26	31	49	44	48	48	45	54
4	Inlet	30	41	67	60	65	66	61	72
	Outlet	30	39	66	64	70	71	65	75
	Radiated	26	31	55	47	50	53	52	64
5	Inlet	27	38	59	55	61	62	56	67
	Outlet	27	35	58	60	65	66	59	70
	Radiated	23	28	47	43	47	48	47	54
6	Inlet	29	40	59	55	60	59	52	65
	Outlet	27	39	57	58	63	63	54	67
	Radiated	25	29	47	43	45	45	42	52
7	Inlet	27	39	65	56	60	62	56	68
	Outlet	26	36	60	59	65	66	59	70
	Radiated	19	29	55	44	46	49	48	58
8	Inlet	24	35	52	51	54	55	48	60
	Outlet	24	31	51	54	58	59	50	63
	Radiated	17	25	43	40	41	43	40	48
9	Inlet	24	40	52	51	53	52	43	58
	Outlet	23	37	51	53	56	56	45	60
	Radiated	17	30	42	39	40	40	35	47
10	Inlet	24	37	43	45	49	51	37	54
	Outlet	20	35	43	48	53	54	40	58
	Radiated	23	31	35	35	38	41	33	45
11	Inlet	21	32	39	42	43	42	28	48
	Outlet	32	29	40	43	47	45	29	50
	Radiated	20	26	31	31	33	32	23	38
12	Inlet	23	31	39	41	41	36	26	46
	Outlet	23	27	39	41	44	40	27	47
	Radiated	22	25	31	30	30	27	21	36


Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	39	56	77	71	73	69	65	79
	Outlet	38	56	73	74	77	77	71	82
	Radiated	38	44	64	64	56	54	50	68
2	Inlet	34	51	69	63	68	63	60	73
	Outlet	34	52	65	68	70	71	64	76
	Radiated	33	39	56	56	51	48	45	60
3	Inlet	33	52	65	59	65	60	57	69
	Outlet	36	54	62	66	68	68	60	73
	Radiated	32	40	52	52	48	45	42	57
4	Inlet	37	55	77	68	71	67	63	79
	Outlet	36	54	72	72	75	76	69	80
	Radiated	35	43	64	61	54	52	48	66
5	Inlet	32	50	66	60	64	60	58	70
	Outlet	32	50	63	66	68	69	62	74
	Radiated	30	37	53	52	48	46	42	57
6	Inlet	31	50	63	57	62	57	54	67
	Outlet	32	51	60	64	65	65	57	70
	Radiated	29	38	50	50	45	43	39	55
7	Inlet	34	52	72	62	66	62	60	74
	Outlet	34	51	66	69	71	71	66	76
	Radiated	31	39	59	56	50	49	46	62
8	Inlet	28	45	59	55	58	54	53	64
	Outlet	28	45	61	61	62	63	57	68
	Radiated	25	32	47	49	42	41	38	52
9	Inlet	29	46	56	54	57	52	48	61
	Outlet	38	46	56	58	59	59	50	65
	Radiated	26	33	43	48	41	38	34	50
10	Inlet	34	56	56	53	57	54	54	63
	Outlet	32	57	55	58	60	62	58	67
	Radiated	26	49	47	48	43	44	42	54
11	Inlet	36	44	48	46	48	50	45	55
	Outlet	24	44	46	50	52	55	45	58
	Radiated	28	38	40	41	35	40	33	46
12	Inlet	28	40	48	44	47	41	35	52
	Outlet	25	41	43	47	49	47	36	53
	Radiated	20	33	39	39	33	30	23	43


PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{sf} : Static pressure in Pa.
- SFP: specific fan power in $W/m^3/h$ (blue curves).
- P: Input power in W.
- Performance data in accordance with ISO 5801.

IRB/2-200B

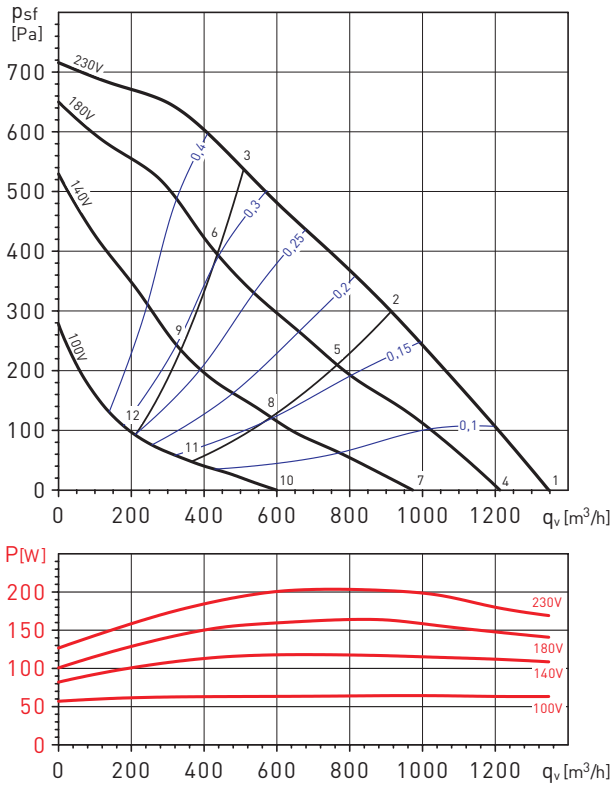

IRB/4-225

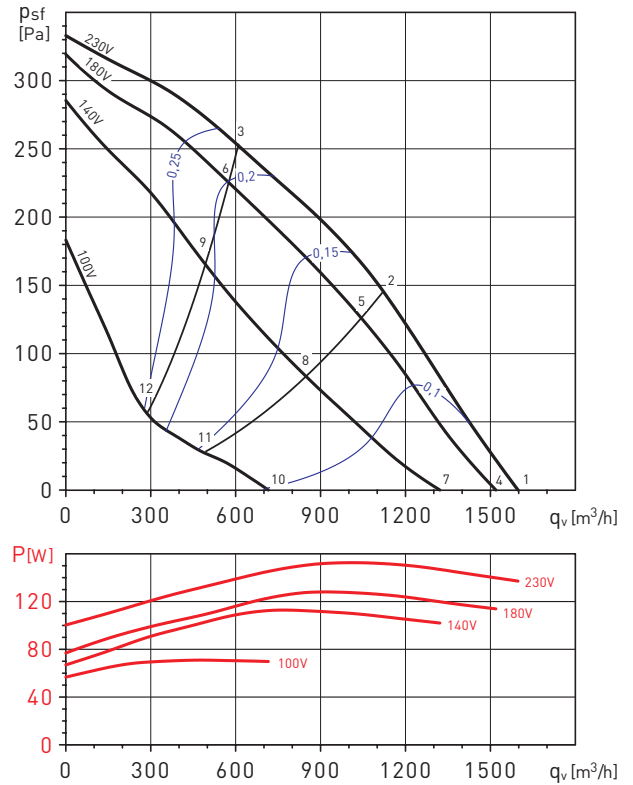

Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	42	57	84	73	77	71	68	85
	Outlet	43	59	79	77	79	80	73	85
	Radiated	42	49	72	62	60	57	52	73
2	Inlet	36	54	71	65	71	65	62	75
	Outlet	37	56	71	71	74	74	66	79
	Radiated	37	45	59	55	55	51	46	62
3	Inlet	36	55	70	63	70	64	60	74
	Outlet	38	57	66	70	72	72	64	77
	Radiated	37	46	58	52	54	50	44	61
4	Inlet	41	56	80	69	75	69	65	82
	Outlet	40	56	74	74	77	77	70	82
	Radiated	41	47	69	59	58	54	50	70
5	Inlet	34	54	69	62	68	62	58	73
	Outlet	34	51	66	68	70	71	63	75
	Radiated	35	45	58	51	52	48	43	60
6	Inlet	33	56	65	59	66	60	55	70
	Outlet	34	54	65	67	68	68	59	73
	Radiated	34	47	53	49	50	46	40	57
7	Inlet	36	53	72	63	69	63	59	75
	Outlet	36	54	66	68	71	71	65	76
	Radiated	36	45	61	54	53	49	45	63
8	Inlet	28	53	60	56	61	54	53	65
	Outlet	28	55	66	61	63	63	57	70
	Radiated	28	45	49	47	45	41	39	53
9	Inlet	31	47	56	57	59	53	47	63
	Outlet	32	52	58	60	61	60	49	66
	Radiated	31	40	45	47	44	40	33	51
10	Inlet	29	50	54	52	57	53	53	62
	Outlet	27	51	52	56	59	60	55	65
	Radiated	28	47	44	43	43	41	41	51
11	Inlet	24	43	47	45	50	47	37	54
	Outlet	22	41	45	49	51	54	40	57
	Radiated	24	40	37	35	35	35	25	44
12	Inlet	26	42	46	44	48	40	32	52
	Outlet	28	42	45	48	49	46	34	54
	Radiated	25	39	36	35	33	28	20	42


Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	45	67	68	72	71	66	61	77
	Outlet	45	74	71	75	77	73	66	82
	Radiated	46	64	61	61	61	54	48	68
2	Inlet	41	65	64	68	66	62	54	73
	Outlet	42	69	67	71	72	69	60	77
	Radiated	42	61	57	57	56	49	41	65
3	Inlet	40	59	61	64	63	59	54	69
	Outlet	41	64	63	66	68	64	56	72
	Radiated	41	55	54	53	53	47	41	60
4	Inlet	44	68	67	71	69	65	60	76
	Outlet	44	77	70	74	75	72	65	81
	Radiated	45	64	60	60	59	52	47	67
5	Inlet	40	64	62	66	64	60	52	71
	Outlet	40	70	64	69	70	66	57	76
	Radiated	41	59	56	55	54	48	40	63
6	Inlet	39	59	60	62	62	58	52	68
	Outlet	40	64	61	65	66	62	54	71
	Radiated	40	54	53	51	51	46	39	59
7	Inlet	41	60	62	66	64	60	55	70
	Outlet	41	64	64	69	71	67	62	75
	Radiated	42	54	56	55	54	48	43	61
8	Inlet	37	55	57	61	59	54	46	65
	Outlet	37	58	59	63	64	60	51	68
	Radiated	38	49	50	50	48	42	33	56
9	Inlet	37	53	56	59	58	53	47	63
	Outlet	38	56	57	61	62	58	49	66
	Radiated	38	47	50	48	47	41	35	54
10	Inlet	37	49	48	51	51	51	32	57
	Outlet	34	50	48	53	55	54	35	60
	Radiated	38	46	42	42	40	38	19	50
11	Inlet	29	43	44	47	47	40	27	52
	Outlet	28	46	44	48	48	42	30	53
	Radiated	31	40	37	38	36	27	14	44
12	Inlet	28	47	43	46	44	37	29	52
	Outlet	30	48	44	49	48	42	36	54
	Radiated	30	44	37	37	33	24	17	46


PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{sf} : Static pressure in Pa.
- SFP: specific fan power in $W/m^3/h$ (blue curves).
- P: Input power in W.
- Performance data in accordance with ISO 5801.

IRB/4-315 A

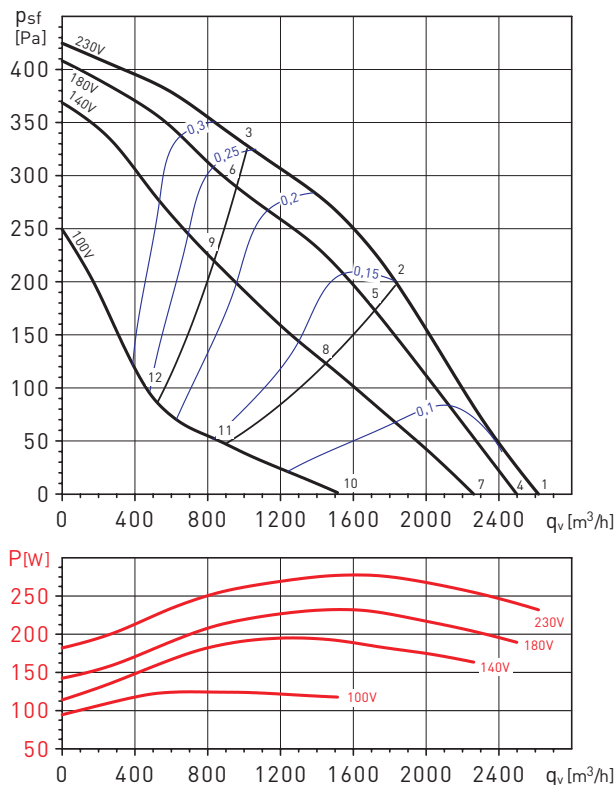

IRB/4-315 B

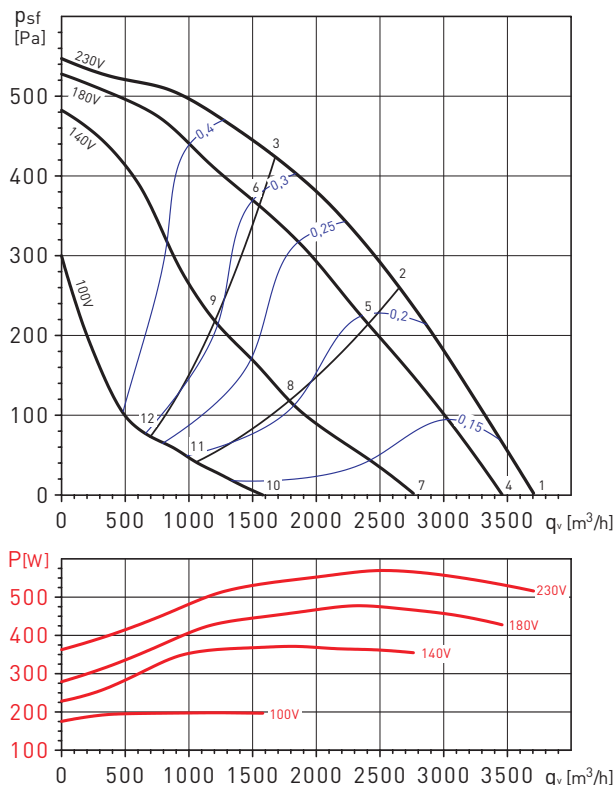

Sound power level spectrums in dB(A)



Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	46	71	67	73	71	68	60	78
	Outlet	47	71	73	76	78	74	65	82
	Radiated	42	64	61	60	64	58	52	69
2	Inlet	43	67	63	68	67	62	55	73
	Outlet	45	68	69	71	73	68	60	77
	Radiated	40	61	57	55	59	52	47	65
3	Inlet	46	64	61	65	66	60	53	71
	Outlet	45	64	66	68	70	64	57	74
	Radiated	42	58	55	52	58	50	46	63
4	Inlet	45	71	66	71	70	67	58	77
	Outlet	47	70	73	75	77	73	64	81
	Radiated	42	63	59	58	61	56	51	67
5	Inlet	42	66	61	65	64	60	53	71
	Outlet	43	69	68	69	71	65	59	76
	Radiated	39	57	54	52	55	50	45	62
6	Inlet	44	64	60	64	62	59	52	69
	Outlet	44	63	64	66	68	62	55	72
	Radiated	41	56	53	50	53	48	44	60
7	Inlet	44	71	63	68	66	63	55	75
	Outlet	45	72	69	72	74	70	62	79
	Radiated	41	64	56	54	58	53	48	66
8	Inlet	41	60	56	63	59	54	49	67
	Outlet	40	59	61	64	65	58	53	69
	Radiated	37	52	50	49	50	44	42	57
9	Inlet	43	59	57	61	59	55	48	66
	Outlet	44	59	60	63	64	59	51	69
	Radiated	40	51	50	47	50	45	41	57
10	Inlet	44	54	52	56	54	50	46	61
	Outlet	43	53	58	60	63	56	52	66
	Radiated	42	49	46	45	46	41	38	54
11	Inlet	35	47	46	47	44	40	31	53
	Outlet	39	45	48	49	49	43	33	55
	Radiated	33	42	40	36	35	31	26	46
12	Inlet	37	50	48	50	47	42	32	55
	Outlet	40	47	48	54	52	44	35	57
	Radiated	35	45	42	39	39	32	26	48

Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	55	75	76	80	75	73	64	83
	Outlet	58	77	81	84	85	81	73	90
	Radiated	54	72	67	69	63	59	54	75
2	Inlet	51	72	73	76	71	69	60	80
	Outlet	58	73	77	80	81	76	68	85
	Radiated	50	69	64	66	59	55	50	72
3	Inlet	53	70	69	72	67	66	57	77
	Outlet	54	71	74	76	77	72	64	81
	Radiated	52	68	60	62	55	52	48	69
4	Inlet	54	72	74	78	73	71	62	82
	Outlet	56	77	79	82	83	78	70	87
	Radiated	53	68	64	70	61	57	50	73
5	Inlet	50	70	69	74	68	66	56	77
	Outlet	55	71	74	77	77	72	64	82
	Radiated	49	66	59	65	55	52	44	69
6	Inlet	51	68	67	73	66	64	55	76
	Outlet	53	70	71	75	74	69	62	80
	Radiated	51	64	57	64	54	50	43	68
7	Inlet	50	69	67	71	65	63	56	75
	Outlet	51	72	71	75	75	70	64	80
	Radiated	50	64	57	64	53	47	43	67
8	Inlet	46	61	62	70	58	55	48	72
	Outlet	48	61	64	70	67	61	53	73
	Radiated	46	56	51	63	47	39	34	64
9	Inlet	49	61	62	69	61	58	50	71
	Outlet	50	65	65	70	69	64	57	74
	Radiated	48	56	51	61	49	42	37	63
10	Inlet	42	52	56	64	51	51	35	65
	Outlet	44	54	58	64	60	57	44	67
	Radiated	42	47	46	57	43	37	24	58
11	Inlet	37	48	52	65	46	41	32	65
	Outlet	38	51	54	62	53	47	37	63
	Radiated	37	43	43	58	38	26	21	58
12	Inlet	36	48	52	65	47	40	33	65
	Outlet	39	50	54	63	53	45	36	64
	Radiated	37	42	43	58	39	25	21	59

PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{st} : Static pressure in Pa.
- SFP: specific fan power in $W/m^3/h$ (blue curves).
- P: Input power in W.
- Performance data in accordance with ISO 5801.

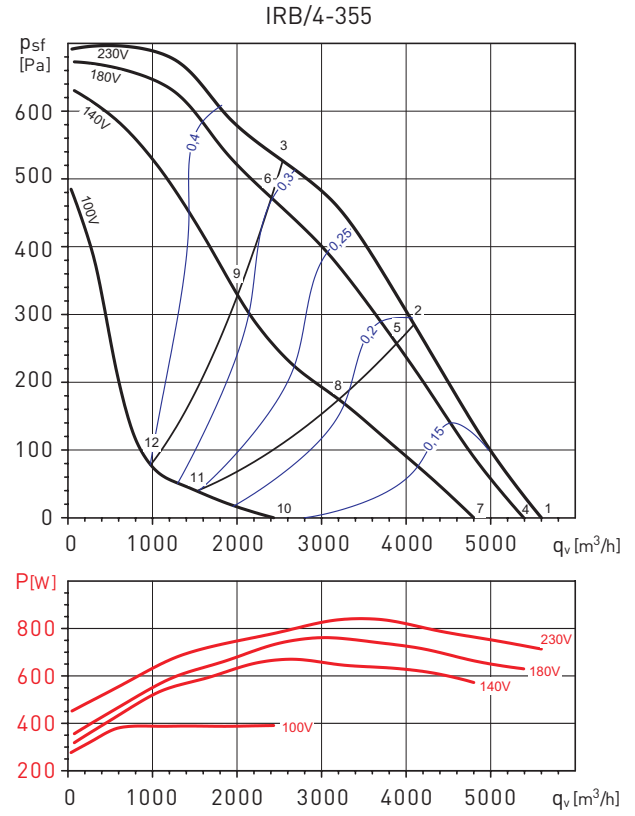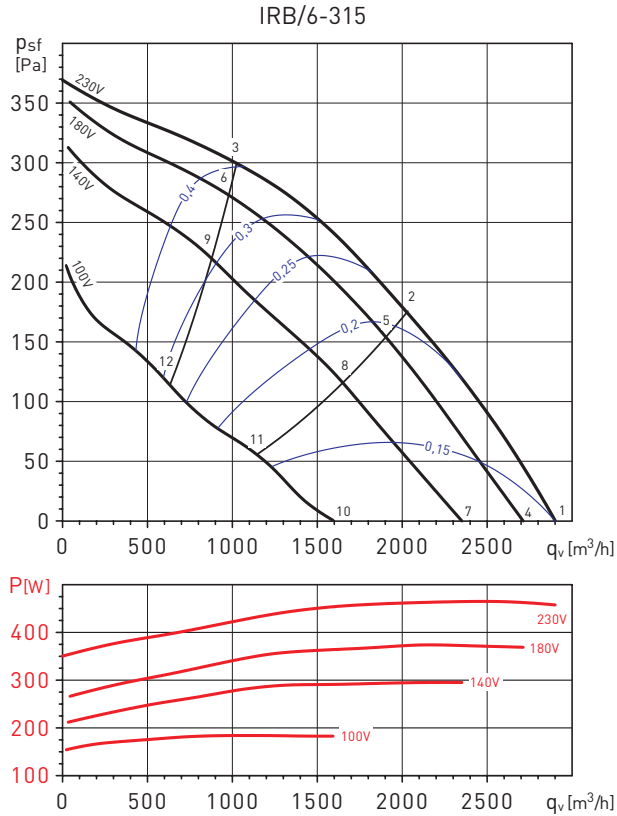

Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	59	70	68	74	71	65	58	78
	Outlet	58	74	75	79	79	72	65	84
	Radiated	61	65	65	67	61	54	45	71
2	Inlet	56	65	64	70	66	61	55	73
	Outlet	56	70	71	76	74	68	62	80
	Radiated	58	61	61	63	57	50	42	67
3	Inlet	57	66	64	70	68	64	58	74
	Outlet	56	70	70	75	75	70	63	80
	Radiated	59	61	61	63	58	53	44	68
4	Inlet	58	68	66	73	69	62	57	76
	Outlet	57	72	73	77	76	70	63	82
	Radiated	61	64	63	65	59	52	43	70
5	Inlet	54	65	63	69	64	59	53	72
	Outlet	55	68	69	74	72	66	60	78
	Radiated	57	61	60	61	54	48	40	67
6	Inlet	57	65	63	69	66	62	56	73
	Outlet	56	70	69	74	73	68	61	79
	Radiated	59	61	60	62	56	51	43	67
7	Inlet	59	63	62	69	64	58	53	72
	Outlet	58	67	68	73	71	64	58	77
	Radiated	62	60	59	62	54	47	39	67
8	Inlet	55	59	59	66	60	55	49	68
	Outlet	54	62	65	69	67	62	55	73
	Radiated	58	56	56	59	51	44	36	64
9	Inlet	57	65	60	67	63	59	53	71
	Outlet	57	68	66	71	70	65	58	76
	Radiated	59	63	57	60	53	48	40	66
10	Inlet	47	55	51	59	52	48	39	62
	Outlet	47	58	57	63	59	54	45	66
	Radiated	48	53	49	54	43	38	26	58
11	Inlet	44	53	49	58	50	44	37	60
	Outlet	45	56	55	61	56	51	43	64
	Radiated	45	51	47	52	41	34	25	56
12	Inlet	48	53	51	60	54	49	43	62
	Outlet	51	57	57	63	60	55	48	66
	Radiated	49	52	49	54	45	39	30	58


Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	58	78	76	81	77	77	70	85
	Outlet	59	77	82	86	88	82	76	92
	Radiated	56	68	67	66	66	61	53	74
2	Inlet	53	74	72	76	72	71	63	80
	Outlet	56	74	78	81	83	76	68	86
	Radiated	50	65	63	61	61	55	46	69
3	Inlet	51	71	67	71	69	68	62	77
	Outlet	55	70	74	76	77	70	64	82
	Radiated	48	62	58	57	58	52	45	65
4	Inlet	57	77	74	79	76	76	69	84
	Outlet	59	76	81	84	87	81	74	90
	Radiated	55	67	65	65	65	59	52	72
5	Inlet	51	73	69	74	70	69	61	78
	Outlet	55	72	76	79	81	74	66	84
	Radiated	49	63	60	59	59	52	44	67
6	Inlet	50	69	65	70	68	67	60	75
	Outlet	54	70	73	75	76	69	62	80
	Radiated	47	59	57	55	56	50	43	64
7	Inlet	54	71	69	74	71	70	65	78
	Outlet	57	73	77	80	82	77	71	86
	Radiated	52	64	61	59	58	53	48	68
8	Inlet	46	66	60	65	62	60	52	70
	Outlet	52	66	69	73	72	65	59	77
	Radiated	44	59	52	50	50	43	35	61
9	Inlet	50	64	61	65	62	61	54	70
	Outlet	52	66	68	69	70	63	57	75
	Radiated	47	58	52	50	50	44	37	60
10	Inlet	44	53	52	56	52	54	39	61
	Outlet	46	53	56	59	61	58	44	66
	Radiated	42	46	44	42	40	37	23	51
11	Inlet	36	49	47	57	44	41	33	58
	Outlet	38	49	49	54	51	47	37	58
	Radiated	34	42	39	43	32	25	17	47
12	Inlet	37	48	45	52	43	43	33	55
	Outlet	38	48	48	54	49	48	37	57
	Radiated	34	41	37	38	31	26	17	45


PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{sf} : Static pressure in Pa.
- SFP: specific fan power in $W/m^3/h$ (blue curves).
- P: Input power in W.
- Performance data in accordance with ISO 5801.

IRB/6-355

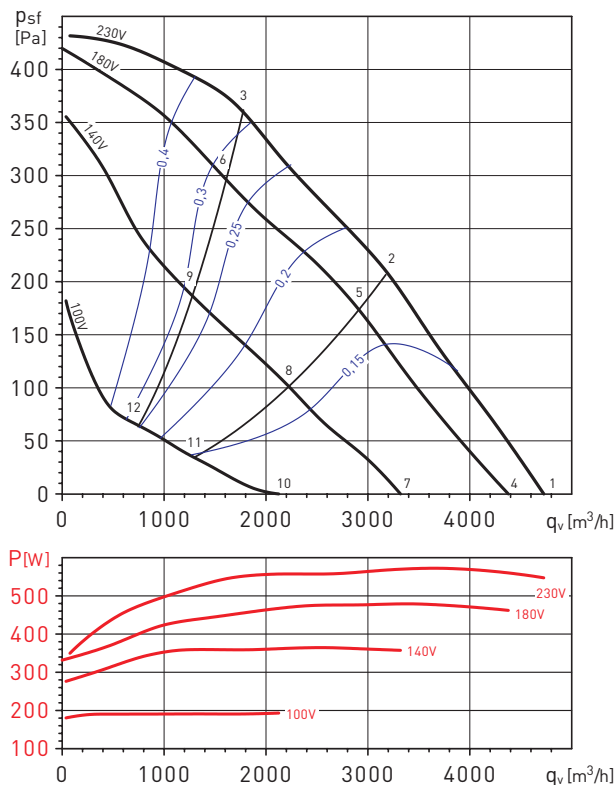

IRB/6-400

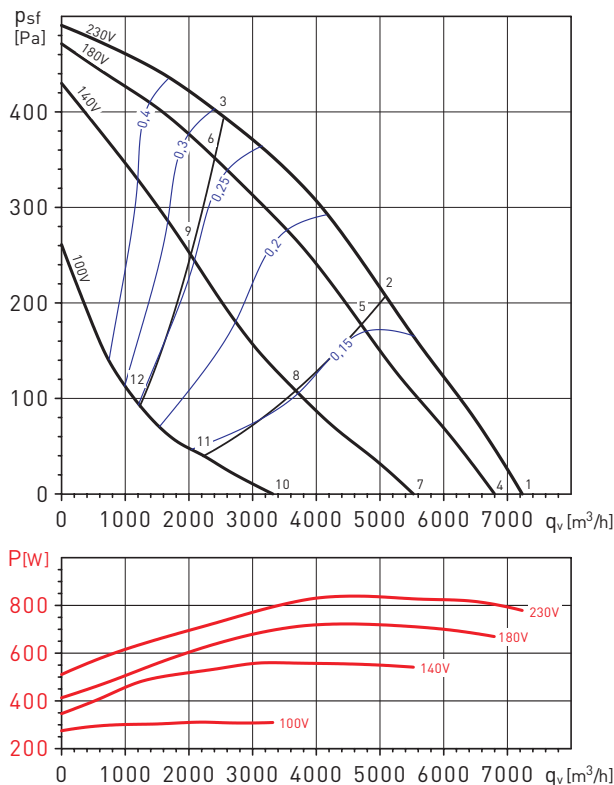

Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	59	72	74	77	72	69	61	53
	Outlet	58	75	78	82	82	75	67	59
	Radiated	59	66	63	66	64	63	55	46
2	Inlet	55	68	68	70	66	63	57	50
	Outlet	56	71	72	76	75	68	61	55
	Radiated	55	62	57	60	58	57	51	43
3	Inlet	56	74	69	72	69	68	62	55
	Outlet	58	72	72	77	77	71	65	60
	Radiated	56	68	58	61	61	62	56	48
4	Inlet	59	69	71	74	69	66	58	50
	Outlet	58	71	75	79	79	71	63	56
	Radiated	59	61	60	63	60	60	52	43
5	Inlet	55	68	65	67	63	60	54	47
	Outlet	56	66	68	72	71	64	58	51
	Radiated	55	60	54	56	54	54	48	40
6	Inlet	54	63	67	70	67	65	59	53
	Outlet	56	64	69	74	74	68	62	57
	Radiated	54	55	56	59	58	60	53	46
7	Inlet	55	60	63	65	60	57	48	40
	Outlet	57	63	66	70	69	61	53	46
	Radiated	55	53	53	54	52	51	42	33
8	Inlet	50	54	57	59	54	52	45	38
	Outlet	52	58	59	63	61	56	48	41
	Radiated	50	46	46	48	46	46	39	31
9	Inlet	54	55	61	63	60	58	52	45
	Outlet	56	58	63	68	67	61	55	50
	Radiated	54	48	50	52	52	52	46	38
10	Inlet	41	48	50	50	47	43	33	29
	Outlet	42	52	52	56	54	47	38	31
	Radiated	42	43	40	41	41	36	28	23
11	Inlet	36	44	45	45	40	37	32	29
	Outlet	38	50	46	49	46	39	34	29
	Radiated	38	38	35	36	34	30	26	23
12	Inlet	39	44	46	47	43	40	33	29
	Outlet	37	50	47	50	48	42	36	30
	Radiated	40	38	36	37	37	33	28	23


Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	62	75	75	77	76	72	66	59
	Outlet	61	78	81	84	85	77	71	63
	Radiated	60	68	67	68	65	61	54	46
2	Inlet	58	71	70	72	70	67	61	53
	Outlet	58	73	77	80	79	71	64	58
	Radiated	56	64	62	64	60	56	48	37
3	Inlet	59	69	67	69	67	64	59	54
	Outlet	57	69	72	75	74	67	61	55
	Radiated	56	62	59	60	56	53	47	39
4	Inlet	63	75	73	75	74	70	65	56
	Outlet	61	78	79	83	83	75	69	61
	Radiated	60	65	65	66	63	59	53	45
5	Inlet	58	70	68	69	68	64	58	50
	Outlet	58	73	75	77	76	68	62	56
	Radiated	56	60	59	61	57	53	46	38
6	Inlet	57	66	65	67	65	63	58	52
	Outlet	56	69	70	73	72	65	59	53
	Radiated	55	56	56	58	54	52	46	38
7	Inlet	61	67	66	68	66	63	57	47
	Outlet	60	69	73	76	76	67	63	53
	Radiated	59	62	58	59	56	52	46	38
8	Inlet	54	63	59	61	59	56	48	40
	Outlet	54	63	66	68	67	60	55	50
	Radiated	52	58	51	52	48	45	37	28
9	Inlet	55	61	60	62	60	58	52	45
	Outlet	55	63	65	68	67	60	55	48
	Radiated	53	56	52	53	49	47	40	33
10	Inlet	46	63	53	55	52	51	38	32
	Outlet	47	63	59	61	60	56	44	36
	Radiated	44	55	44	45	41	39	27	20
11	Inlet	41	63	47	49	47	42	34	31
	Outlet	42	63	53	54	52	46	40	33
	Radiated	38	55	38	39	36	31	22	18
12	Inlet	43	60	48	50	48	45	37	31
	Outlet	41	58	52	55	54	51	47	44
	Radiated	40	52	40	41	37	33	26	19


PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{sf} : Static pressure in Pa.
- SFP: specific fan power in $W/m^3/h$ (blue curves).
- P: Input power in W.
- Performance data in accordance with ISO 5801.

IRB/6-450

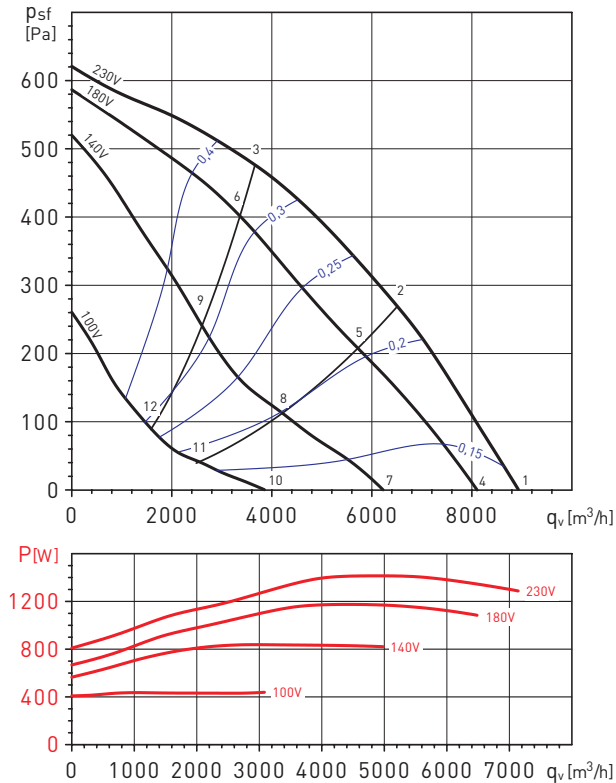

IRT/4-315 A

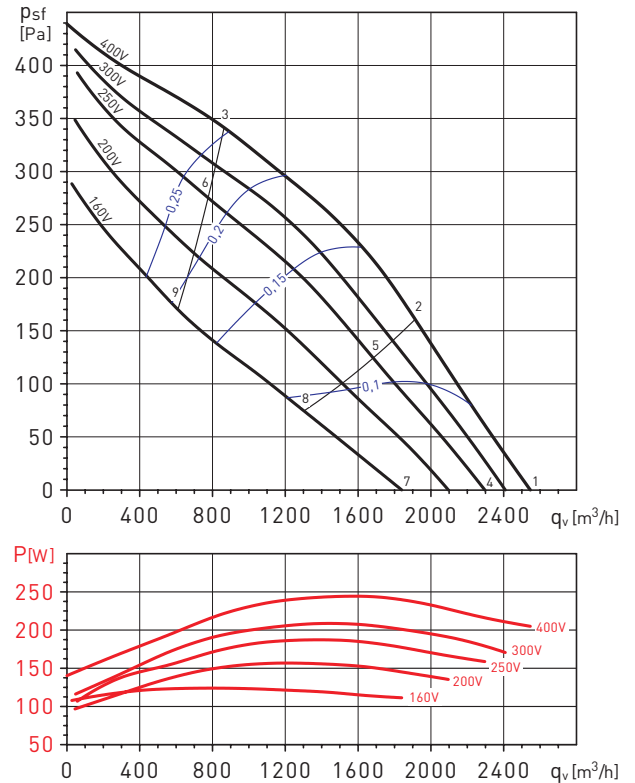

Sound power level spectrums in dB(A)



Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	67	77	79	81	80	74	67	86
	Outlet	69	82	85	88	88	80	73	93
	Radiated	64	72	74	75	71	63	53	80
2	Inlet	64	74	75	76	75	69	63	81
	Outlet	67	76	81	83	82	75	69	88
	Radiated	61	68	69	70	66	59	44	75
3	Inlet	63	70	72	73	73	69	63	79
	Outlet	66	73	76	79	78	72	67	83
	Radiated	59	65	67	68	65	58	50	72
4	Inlet	68	75	76	77	76	70	64	83
	Outlet	69	81	82	85	84	76	70	90
	Radiated	65	70	71	71	67	59	50	77
5	Inlet	67	71	70	71	69	64	57	77
	Outlet	72	75	76	79	77	70	65	84
	Radiated	65	66	65	65	60	53	43	72
6	Inlet	61	69	69	70	69	66	59	76
	Outlet	66	71	75	78	77	72	67	83
	Radiated	59	64	63	64	60	54	46	70
7	Inlet	64	72	67	68	65	60	54	75
	Outlet	70	80	73	75	73	66	60	83
	Radiated	62	68	62	62	56	49	40	70
8	Inlet	64	76	63	61	58	55	47	76
	Outlet	68	76	67	69	67	64	58	78
	Radiated	61	71	57	56	49	44	33	72
9	Inlet	66	73	63	63	61	58	52	75
	Outlet	72	78	68	71	70	65	59	81
	Radiated	64	68	58	57	52	47	38	70
10	Inlet	56	72	58	56	52	51	41	72
	Outlet	55	70	61	62	59	55	46	72
	Radiated	55	66	55	52	45	42	30	67
11	Inlet	57	71	57	52	48	45	39	72
	Outlet	55	68	57	57	56	50	44	69
	Radiated	55	66	54	48	41	36	28	67
12	Inlet	58	74	57	54	50	48	41	74
	Outlet	56	68	58	59	60	54	49	70
	Radiated	56	68	54	50	43	39	30	69

Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	47	72	67	71	71	68	63	77
	Outlet	48	71	73	77	79	75	68	83
	Radiated	45	67	64	64	64	61	54	72
2	Inlet	46	66	64	67	66	64	57	73
	Outlet	47	67	70	72	75	70	63	79
	Radiated	44	61	61	60	60	57	48	67
3	Inlet	49	64	62	65	65	63	57	71
	Outlet	49	65	66	69	72	67	59	76
	Radiated	46	59	60	58	58	56	48	65
4	Inlet	46	71	64	68	68	66	60	75
	Outlet	46	72	71	74	77	72	65	81
	Radiated	45	67	61	62	61	58	52	70
5	Inlet	44	67	61	64	63	61	54	71
	Outlet	45	66	66	69	71	67	59	75
	Radiated	42	62	58	57	56	53	45	65
6	Inlet	46	61	59	62	61	59	53	68
	Outlet	47	62	63	66	69	64	55	72
	Radiated	45	57	56	56	54	52	45	62
7	Inlet	43	67	59	62	62	60	55	70
	Outlet	44	64	64	68	70	66	60	74
	Radiated	43	61	56	57	55	52	47	65
8	Inlet	39	60	55	57	56	53	46	64
	Outlet	41	57	60	62	64	60	52	68
	Radiated	39	54	52	52	49	46	38	59
9	Inlet	44	53	54	56	55	52	45	61
	Outlet	43	55	57	59	62	58	52	66
	Radiated	43	48	51	51	48	45	37	56

PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{st} : Static pressure in Pa.
- SFP: specific fan power in $W/m^3/h$ (blue curves).
- P: Input power in W.
- Performance data in accordance with ISO 5801.

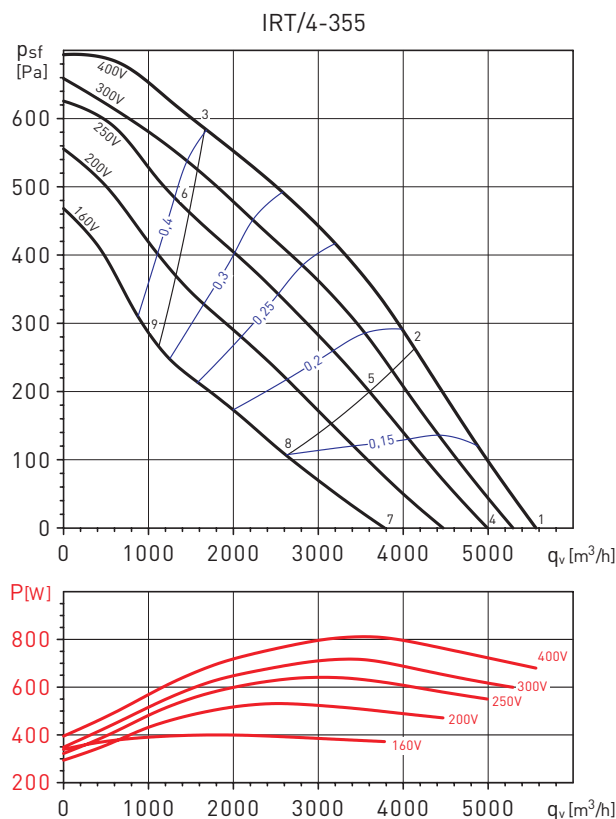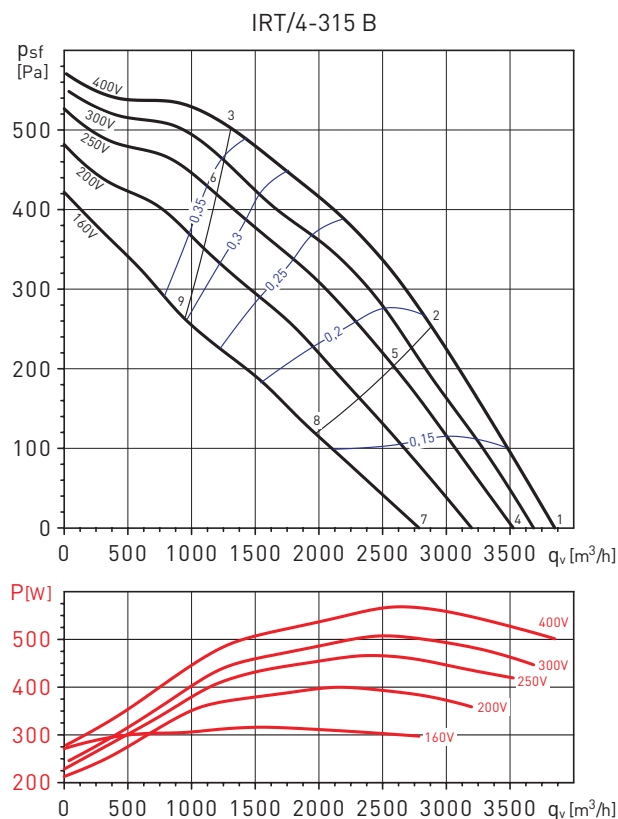

Sound power level spectrums in dB(A)



Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	56	76	77	83	78	75	67	65
	Outlet	57	77	82	85	86	82	73	68
	Radiated	56	75	70	70	64	59	56	54
2	Inlet	52	71	74	80	74	70	63	57
	Outlet	55	73	78	81	82	76	69	62
	Radiated	53	70	66	66	60	54	52	46
3	Inlet	54	69	70	75	70	67	61	54
	Outlet	56	72	74	76	77	72	65	57
	Radiated	55	68	62	62	56	51	50	44
4	Inlet	54	73	74	81	75	72	64	61
	Outlet	55	77	79	82	83	78	70	66
	Radiated	54	64	63	69	61	57	54	51
5	Inlet	50	70	71	76	70	66	60	52
	Outlet	53	72	75	77	78	73	65	58
	Radiated	51	61	60	64	57	52	50	42
6	Inlet	53	68	67	73	67	63	57	49
	Outlet	54	70	71	74	74	68	62	54
	Radiated	53	59	56	60	53	49	47	39
7	Inlet	50	69	69	75	68	64	61	50
	Outlet	52	71	73	76	76	71	65	55
	Radiated	50	64	58	63	55	49	50	39
8	Inlet	46	66	65	70	62	59	52	44
	Outlet	49	65	68	71	70	64	58	49
	Radiated	47	60	54	58	49	44	41	33
9	Inlet	48	63	62	68	61	57	50	43
	Outlet	49	66	64	68	67	61	55	45
	Radiated	48	57	51	56	48	42	39	32

Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	56	75	75	82	78	78	70	65
	Outlet	58	77	81	86	88	82	75	68
	Radiated	55	67	67	67	66	64	61	56
2	Inlet	52	72	71	78	73	72	65	57
	Outlet	55	74	78	82	83	76	68	61
	Radiated	51	63	62	63	62	59	55	48
3	Inlet	50	70	67	73	69	67	61	55
	Outlet	52	70	74	77	78	70	64	57
	Radiated	49	61	59	58	57	54	51	46
4	Inlet	55	75	72	78	75	75	68	61
	Outlet	56	74	78	82	84	78	71	64
	Radiated	53	69	64	64	63	60	58	52
5	Inlet	48	69	66	73	69	68	61	52
	Outlet	52	71	74	77	79	71	64	56
	Radiated	47	64	58	58	57	54	51	43
6	Inlet	48	65	63	69	65	63	58	51
	Outlet	51	66	70	73	74	66	60	52
	Radiated	47	60	55	54	53	49	49	42
7	Inlet	50	68	65	71	67	67	62	49
	Outlet	52	69	71	75	76	70	64	53
	Radiated	49	60	57	57	56	49	44	33
8	Inlet	45	64	59	65	61	59	51	42
	Outlet	47	65	66	68	69	61	54	45
	Radiated	43	55	51	51	49	41	34	27
9	Inlet	45	61	57	62	57	56	49	41
	Outlet	48	61	62	65	65	58	51	42
	Radiated	44	53	49	48	45	38	32	25

PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{sf} : Static pressure in Pa.
- SFP: specific fan power in $W/m^3/h$ (blue curves).
- P: Input power in W.
- Performance data in accordance with ISO 5801.

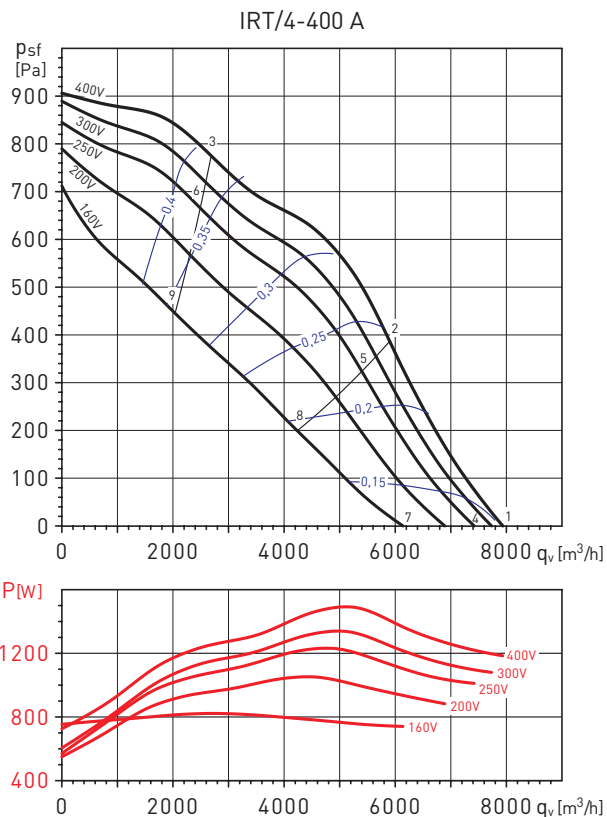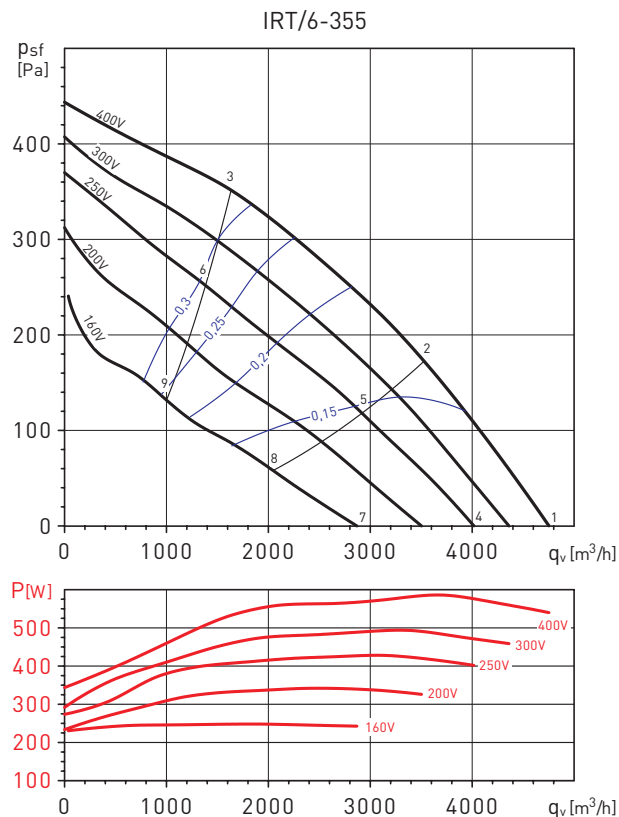

Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	61	72	75	78	73	70	64	82
	Outlet	61	76	78	82	82	75	68	87
	Radiated	61	62	61	62	60	54	49	69
2	Inlet	58	70	72	74	69	66	60	78
	Outlet	58	72	74	78	77	70	64	82
	Radiated	59	60	58	58	55	50	45	65
3	Inlet	59	74	71	74	70	68	61	79
	Outlet	61	74	73	77	77	71	65	82
	Radiated	59	65	57	58	56	52	46	67
4	Inlet	61	67	71	73	68	64	58	77
	Outlet	61	69	73	77	77	69	63	81
	Radiated	61	56	57	57	54	48	44	65
5	Inlet	60	64	67	69	64	60	54	73
	Outlet	57	65	69	72	72	65	58	77
	Radiated	60	53	54	53	50	45	40	63
6	Inlet	58	63	67	69	65	63	56	73
	Outlet	57	62	69	72	72	66	59	77
	Radiated	59	52	53	54	51	47	42	62
7	Inlet	52	58	63	64	58	55	46	68
	Outlet	53	60	64	67	66	59	50	71
	Radiated	51	51	49	48	44	40	32	57
8	Inlet	49	54	59	59	54	50	43	64
	Outlet	50	56	60	62	61	54	47	67
	Radiated	48	47	46	44	40	35	29	53
9	Inlet	50	53	60	61	57	54	47	65
	Outlet	51	54	61	64	63	57	50	69
	Radiated	48	47	47	46	43	39	33	54



Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	63	79	78	83	82	80	73	88
	Outlet	61	81	85	90	91	85	77	95
	Radiated	58	72	71	73	73	66	57	79
2	Inlet	59	76	74	79	78	75	68	84
	Outlet	57	77	81	85	86	79	71	90
	Radiated	54	70	67	69	69	61	53	75
3	Inlet	59	73	71	75	75	72	66	81
	Outlet	59	74	78	81	81	73	66	86
	Radiated	54	67	64	65	66	58	50	72
4	Inlet	62	80	76	82	81	78	71	87
	Outlet	59	79	83	87	89	83	75	93
	Radiated	58	73	69	72	71	63	56	78
5	Inlet	58	76	71	77	76	72	66	82
	Outlet	55	76	79	83	83	76	69	87
	Radiated	53	69	64	67	66	58	50	73
6	Inlet	58	74	68	73	71	68	62	79
	Outlet	58	72	76	79	79	71	64	84
	Radiated	53	66	61	63	62	54	47	70
7	Inlet	60	75	70	76	75	71	66	81
	Outlet	57	76	78	82	84	77	70	88
	Radiated	56	66	63	66	65	57	51	72
8	Inlet	54	67	64	69	68	64	58	74
	Outlet	52	70	73	76	76	68	62	81
	Radiated	50	59	57	59	59	50	43	65
9	Inlet	56	66	62	67	67	64	58	73
	Outlet	55	68	71	74	73	65	59	78
	Radiated	51	58	55	57	57	50	43	63



PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{sf} : Static pressure in Pa.
- SFP: specific fan power in $W/m^3/h$ (blue curves).
- P: Input power in W.
- Performance data in accordance with ISO 5801.

IRT/4-400 B

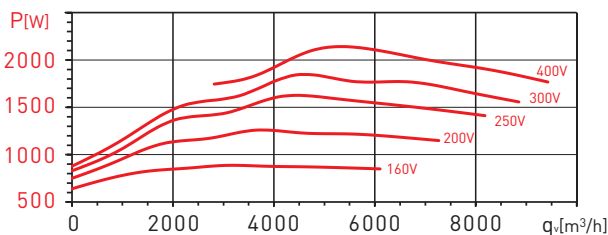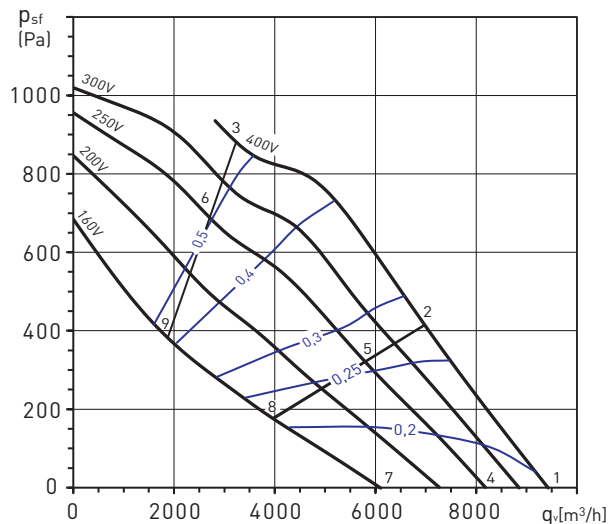

IRT/6-400

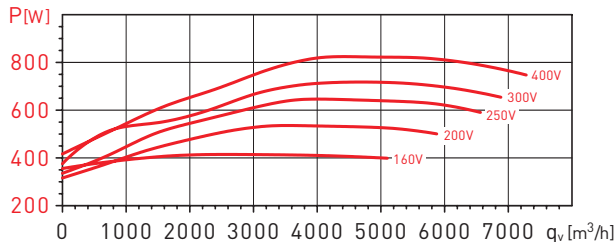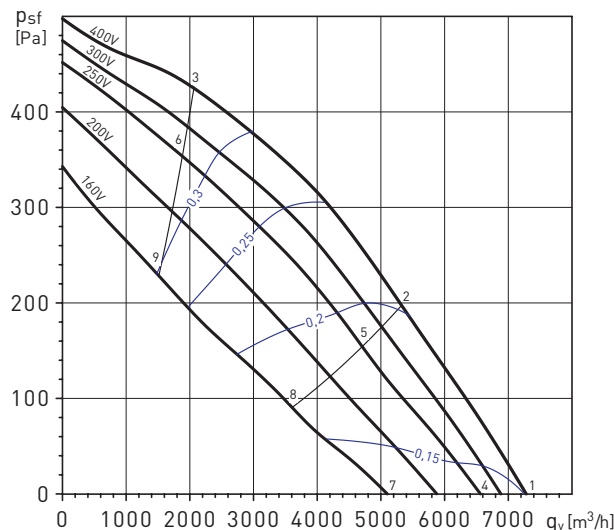

Sound power level spectrums in dB(A)



Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	66	80	83	87	85	83	75	91
	Outlet	62	85	89	93	93	89	81	98
	Radiated	62	72	73	78	72	69	62	81
2	Inlet	61	78	78	81	79	76	70	86
	Outlet	59	80	83	87	87	80	73	92
	Radiated	57	70	68	72	66	62	56	76
3	Inlet	62	76	75	78	76	73	68	83
	Outlet	62	77	81	84	84	77	71	89
	Radiated	58	68	65	70	63	59	54	74
4	Inlet	64	79	79	83	81	79	71	88
	Outlet	61	82	85	89	89	85	76	94
	Radiated	60	73	70	75	69	65	58	78
5	Inlet	58	75	73	76	74	71	65	82
	Outlet	56	76	80	82	82	74	67	87
	Radiated	54	69	63	68	62	57	52	73
6	Inlet	60	73	71	74	72	69	64	79
	Outlet	59	73	77	80	79	73	66	84
	Radiated	56	66	62	65	59	55	50	70
7	Inlet	62	74	71	75	72	68	63	80
	Outlet	58	76	78	80	80	74	67	85
	Radiated	58	67	61	66	60	54	50	71
8	Inlet	57	69	64	67	64	60	54	73
	Outlet	57	74	71	72	71	64	57	79
	Radiated	53	62	55	58	51	46	42	64
9	Inlet	56	64	62	65	62	60	55	70
	Outlet	55	67	68	71	70	64	58	76
	Radiated	52	57	52	56	50	46	42	61

Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	63	76	75	77	76	73	66	83
	Outlet	62	78	81	84	85	78	71	89
	Radiated	60	67	67	67	63	60	51	63
2	Inlet	57	72	70	72	70	66	60	78
	Outlet	57	73	77	79	78	71	64	84
	Radiated	55	64	62	62	57	54	45	56
3	Inlet	60	70	67	69	66	64	59	75
	Outlet	58	70	72	75	74	67	61	79
	Radiated	57	61	58	59	53	51	44	57
4	Inlet	63	75	73	74	73	69	63	80
	Outlet	62	78	78	81	81	74	68	86
	Radiated	61	64	63	62	59	54	48	69
5	Inlet	57	70	67	68	66	62	56	74
	Outlet	59	73	73	75	74	67	60	80
	Radiated	55	60	58	56	52	48	41	64
6	Inlet	56	66	64	66	64	61	56	72
	Outlet	56	69	69	71	70	64	58	76
	Radiated	54	56	55	54	50	47	41	61
7	Inlet	61	65	66	67	65	61	57	73
	Outlet	59	67	72	74	74	66	62	79
	Radiated	59	51	57	55	51	47	41	63
8	Inlet	54	59	61	61	58	55	48	66
	Outlet	53	61	66	68	66	59	53	72
	Radiated	52	45	52	48	44	40	33	57
9	Inlet	53	57	58	59	57	55	49	65
	Outlet	52	59	63	65	64	57	51	69
	Radiated	51	43	49	47	43	40	34	55

PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{st} : Static pressure in Pa.
- SFP: specific fan power in $\text{W}/\text{m}^3/\text{h}$ (blue curves).
- P: Input power in W.
- Performance data in accordance with ISO 5801.

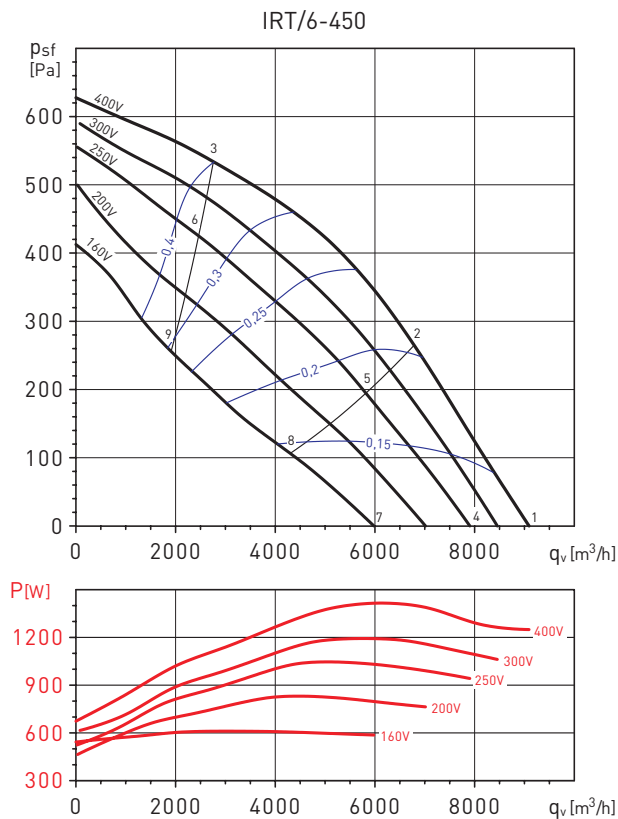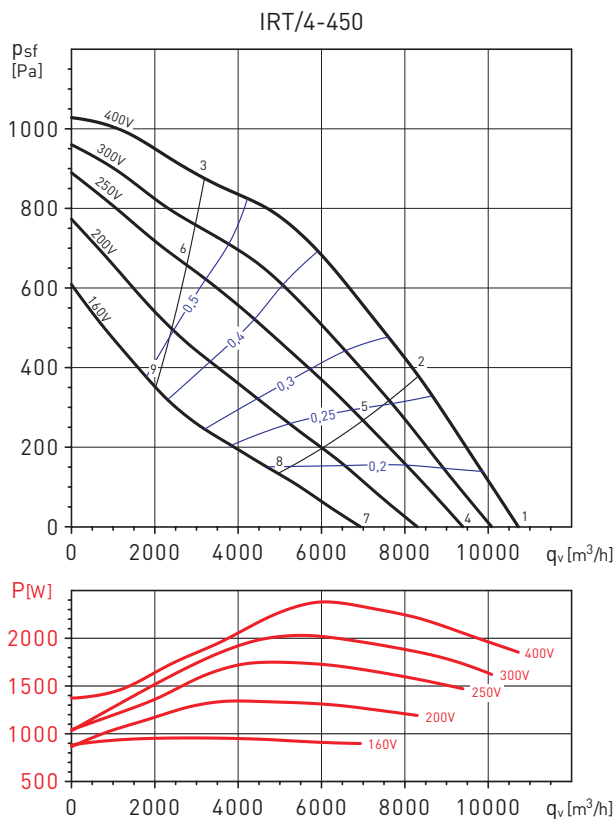

Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	67	80	84	88	87	85	77	93
	Outlet	65	87	89	93	94	90	81	98
	Radiated	61	76	79	81	78	75	64	85
2	Inlet	64	77	81	84	83	79	72	88
	Outlet	62	84	85	89	90	83	75	94
	Radiated	58	73	75	77	74	69	59	81
3	Inlet	62	73	77	80	78	76	70	85
	Outlet	60	77	81	85	84	78	72	89
	Radiated	56	69	72	72	70	65	57	77
4	Inlet	65	79	80	84	83	80	72	89
	Outlet	63	83	86	89	90	85	76	94
	Radiated	58	75	75	77	74	70	59	82
5	Inlet	61	75	75	79	77	74	67	84
	Outlet	60	78	81	84	84	77	70	89
	Radiated	54	72	70	71	68	63	54	77
6	Inlet	59	70	72	75	73	70	65	80
	Outlet	58	73	77	80	79	73	67	84
	Radiated	52	67	67	68	64	60	52	73
7	Inlet	62	73	72	76	74	70	64	81
	Outlet	60	76	78	81	81	75	67	86
	Radiated	55	68	68	69	65	60	51	74
8	Inlet	59	66	66	69	66	62	56	74
	Outlet	60	71	72	74	73	66	59	82
	Radiated	53	62	61	62	58	52	44	67
9	Inlet	55	63	64	66	64	61	56	71
	Outlet	56	65	68	71	70	64	59	76
	Radiated	48	59	59	58	55	51	43	64

Sound power level spectrums in dB(A)

Working point	63	125	250	500	1.000	2.000	4.000	8.000	LwA
1	Inlet	69	77	81	82	80	75	69	87
	Outlet	69	81	85	89	88	80	73	93
	Radiated	64	72	73	73	70	63	54	78
2	Inlet	64	73	76	77	75	71	64	82
	Outlet	66	77	81	84	84	75	70	89
	Radiated	60	68	68	69	66	59	50	74
3	Inlet	64	69	72	72	70	67	61	78
	Outlet	65	73	76	79	77	70	65	83
	Radiated	59	64	64	64	61	54	46	70
4	Inlet	68	76	77	78	75	70	65	83
	Outlet	68	79	82	85	84	75	68	89
	Radiated	63	72	69	69	65	58	50	76
5	Inlet	65	70	72	72	70	65	59	78
	Outlet	69	74	76	79	78	70	65	84
	Radiated	60	66	64	64	60	53	45	70
6	Inlet	60	66	68	69	66	63	58	74
	Outlet	63	70	72	75	74	67	62	80
	Radiated	56	62	60	60	57	51	43	67
7	Inlet	64	65	70	69	66	61	57	75
	Outlet	65	69	74	76	74	65	59	80
	Radiated	59	58	61	60	56	49	43	67
8	Inlet	57	60	64	63	60	56	50	69
	Outlet	57	62	67	70	67	60	55	74
	Radiated	52	53	56	54	50	44	35	61
9	Inlet	55	58	62	61	59	55	50	67
	Outlet	58	60	65	68	66	59	54	72
	Radiated	50	51	54	53	49	43	36	59

ELECTRICAL ACCESORIES



RMB/RMT
Fan speed controllers
by auto-transformer.



VFKB IP65
Adjustable
frequency drives for
three phase motors
from 0,37 to 4 kW
230V or 400V.



VFTM IP21
Adjustable
frequency drive for
three phase motors.

Model	Frequency inverter			
	Single-phase supply 230V-50/60Hz		Three-phase supply 400V-50/60Hz	
	VFKB	VFTM	VFKB	VFTM
IRT/4-315 A	VFKB-24	VFTM MONO 0,18	VFKB-45	VFTM TRI 0,37
IRT/4-315 B	VFKB-24	VFTM MONO 0,37	VFKB-45	VFTM TRI 0,37
IRT/4-355	VFKB-24	VFTM MONO 0,37	VFKB-45	VFTM TRI 0,55
IRT/6-355	VFKB-24	VFTM MONO 0,37	VFKB-45	VFTM TRI 0,37
IRT/4-400 A	VFKB-27	VFTM MONO 1,1	VFKB-45	VFTM TRI 1,5
IRT/4-400 B	-	VFTM MONO 1,1	VFKB-45	VFTM TRI 1,5
IRT/6-400	VFKB-24	VFTM MONO 0,55	VFKB-45	VFTM TRI 0,75
IRT/4-450	-	VFTM MONO 1,5	VFKB-45	VFTM TRI 2,2
IRT/6-450	VFKB-27	VFTM MONO 1,1	VFKB-45	VFTM TRI 1,5




DPS 2-30
DPS 10-100
Differential pressure
switches:
- DPS 2-30: from
20Pa to 300Pa.
- DPS 10-100: from
100Pa to 1000Pa.



LM-230A
Electrical damper
actuator.



TTC-2000
TTC-2000 + TTS-1
TTC-40F + TTS-4
Three phase electric
heater controller.



TG-K330
Duct temperature
sensor.

TG-R530
Room temperature
sensor.



SC02-A
CO₂ and temperature
sensor.

SC02-AD
CO₂ and
temperature sensor,
with display.

SCHT-AD
CO₂ sensor,
temperature and
relative humidity
with display.



CPTA-S/CPTA-E
Presence detector.



TDP-S/TDP-D/TDP-PI
Pressure sensor.

MOUNTING ACCESSORIES



IFL G4
Filtration box with
IFR-G4 filters
incorporated



IFL-F
Filtration box to
install IFR-F filters.
IFR-F
Filters to install
IFL-F filtration box



IBE
Electric heater




IBW
Hot water coil



IBR
Flanges



IAE
Rectangular flexible
connector.



DEF
Rectangular
protection guard.



ISA
Anti-vibration
mounting
(1 ISA = 4 supports)



IAA*
Sound attenuators



IJK
Motorised damper.
As accessory:
actuator LM230A.