



Designed to be installed on the fans discharge side. The minimum air speed through the heater must be 1,5 m/s.

Maximum air temperature through the heater: 40°C.

The heaters are fitted with:


- Tubular structure made of galvanized steel with watertight joints at the entrance and outlet.
- Electrical heater regulation, incorporated.
- Stainless steel AISI-304 / AISI-321 armoured heating element.
- Double protection circuit to connect to the heater control circuit by means of a safety overheat automatic thermostat connected in series with another safety overheat manual reset thermostat (RESET).
- Wiring box IP43.

For the correct operation of the electric coils it is necessary to use different accessories and installation elements (temperature probe, protection pressure switch, contactors, etc.) which are specified in the corresponding instructions, depending on the installation to be carried out.

TECHNICAL CHARACTERISTICS


Modelo	Voltage [V]	Power [W]	Minimum airflow [m³/h]	Ø [mm]
MBE-100/04B-R	1/230	400	50	100
MBE-100/08B-R	1/230	800	50	100
MBE-125/04B-R	1/230	400	70	125
MBE-125/08B-R	1/230	800	70	125
MBE-125/12B-R	1/230	1200	70	125
MBE-160/07B-R	1/230	700	110	160
MBE-160/14B-R	1/230	1400	110	160
MBE-160/21B-R	1/230	2100	110	160
MBE-200/20T-R	2/400	2000	170	200
MBE-200/30T-R	2/400	3000	170	200
MBE-200/40T-R	2/400	4000	170	200
MBE-200/50T-R	2/400	5000	170	200
MBE-200/60T-R	2/400	6000	170	200
MBE-250/20T-R	2/400	2000	270	250
MBE-250/30T-R	2/400	3000	270	250
MBE-250/40T-R	2/400	4000	270	250
MBE-250/50T-R	2/400	5000	270	250
MBE-250/60T-R	2/400	6000	270	250
MBE-250/90T-R	3/400	9000	270	250
MBE-315/30T-R	2/400	3000	430	315
MBE-315/60T-R	2/400	6000	430	315
MBE-315/90T-R	3/400	9000	430	315
MBE-315/120T-R	3/400	12000	430	315
MBE-355/60T-R	2/400	6000	540	355
MBE-355/90T-R	3/400	9000	540	355
MBE-355/120T-R	3/400	12000	540	355
MBE-400/60T-R	2/400	6000	680	400
MBE-400/90T-R	3/400	9000	680	400
MBE-400/120T-R	3/400	12000	680	400
MBE-400/150T-R	3/400	15000	680	400
MBE-450/90T-R	3/400	9000	860	450
MBE-450/150T-R	3/400	15000	860	450
MBE-500/60T-R	2/400	6000	1.070	500
MBE-500/90T-R	3/400	9000	1.070	500
MBE-500/120T-R	3/400	12000	1.070	500

DIMENSIONS (mm)

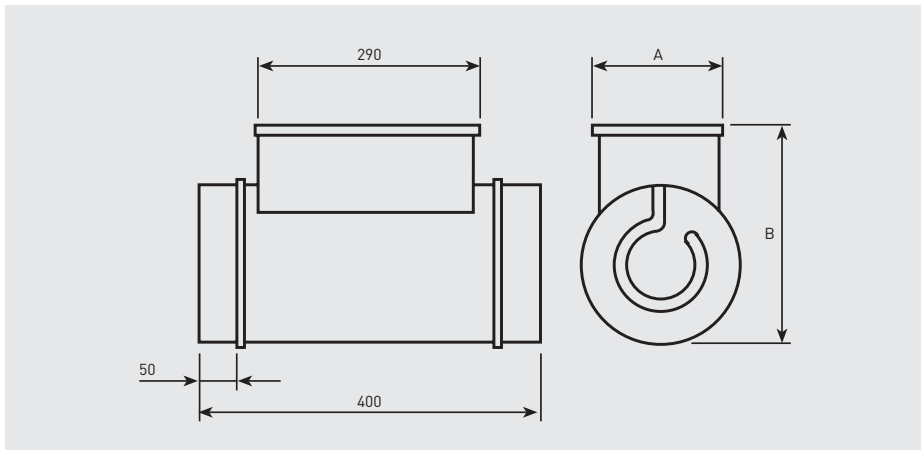

Model	D
MBE-100	100
MBE-125	125
MBE-160	160
MBE-200	200
MBE-250	250
MBE-315	315
MBE-355	355
MBE-400	400
MBE-450	450
MBE-500	500

PERFORMANCE CURVES

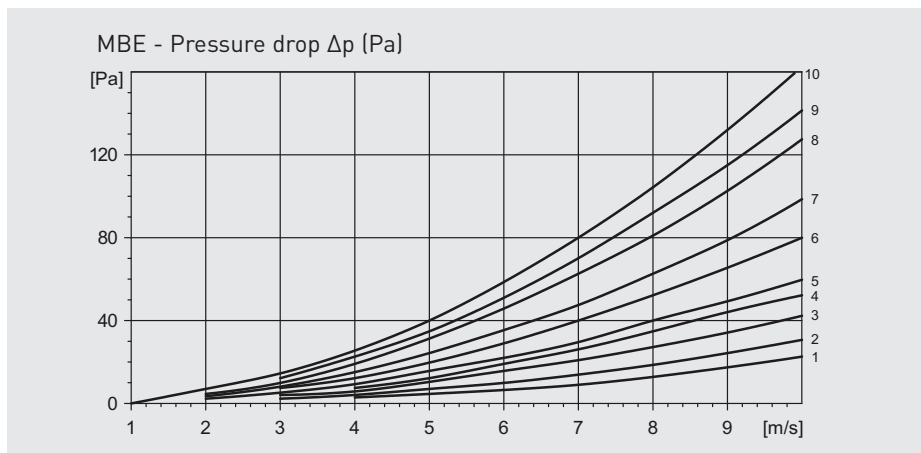

SELECTION EXAMPLE

- DATA:
- Airflow: 700 m³/h (Q)
 - Temp. of supplied air: 5°C
 - Temp. of exhausted air: 27°C

ELECTRIC HEATER POWER REQUIRED:
 $P = Q \times 0,36 \times \Delta T = 700 \times 0,36 \times 22 = 5544 \text{ W}$

HEATER SELECTION MBE-200/50T-R or
 MBE-250/60T-R (Diagram 2)

- The final selection depends on:
- Total system pressure drop
 - Desired sound level
 - Available space

Model	Curve	Model	Curve	Model	Curve
100/04B	1	250/20T	1	355/180T	9
100/08B	7	250/30T	2	400/60T	1
125/04B	1	250/40T	2	400/90T	2
125/08B	5	250/50T	4	400/120T	3
125/12B	6	250/60T	5	400/150T	8
160/07B	1	250/90T	7	400/180T	10
160/14B	4	315/30T	1	450/90T	2
160/21B	5	315/60T	2	450/150T	7
200/21B	2	315/90T	4	500/60T	1
200/20T	2	315/120T	5	500/90T	1
200/30T	4	315/150T	8	500/120T	2
200/40T	5	355/60T	2	500/150T	4
200/50T	6	355/90T	3	500/180T	7
200/60T	7	355/120T	4		
200/90T	10	355/150T	7		

ELECTRIC HEATER ACCESSORIES

For more information see electrical accessories.




PULSER
Single phase electric heater controller.



TTC-25 and TTC-40F
Three phase electric heater controller.



TTC-2000
Three phase electric heater controller.



TT-S1
Additional PCB to increase the output power controlled.




TG-R
Room temperature sensor.
TG-R430: Adjustable
TG-R530: Not adjustable



TG-K
Duct temperature sensor.



PRESOSTATO DPS
Differential pressure switch.



TBI-10 / TBI-30
External potentiometer.



TT-S4/D
Module to increase the controller power TTC-40F, up to 66kW.



TRAF0-15D
Transformer to power the TT-S4/D to 24V.